

Tiger Pro 72HC

535-555 Watt

MONOFAZIALES MODUL

P-Type

Positive Leistungstoleranz von 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Qualitätsmanagementsystem

ISO14001:2015: Umweltmanagementsystem

ISO45001:2018

Managementsysteme für Sicherheit und Gesundheit bei der Arbeit



MBB HC Technologie

WICHTIGE MERKMALE



Multi-Busbar-Technologie

Mehr Modulleistung und Zuverlässigkeit dank verbesserter Lichtabsorption und verbesserten Stromtransport.



Maximale Lebensdauer auch unter extremen Umweltbedingungen

Hohe Salz- sowie Ammoniak- Beständigkeit.



Reduzierter Hot-Spot-Verlust

Optimiertes elektrisches Design und geringerer Betriebsstrom für reduzierten Hot-Spot-Verlust und einen besseren Temperaturkoeffizienten.



Verbesserte mechanische Widerstandskraft

Für den Einsatz bei Wind- und Schneelasten von bis zu 2400 Pa bzw. 5400 Pa zertifiziert.




Mehr Ertrag über die gesamte Lebensdauer

0,55% jährliche Leistungsdegradation und 25 Jahre lineare Leistungsgarantie.



LINEARE LEISTUNGSGARANTIE

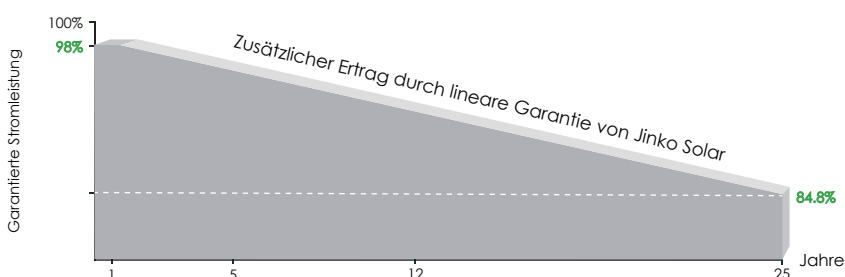

12 Jahre Produktgarantie

25 Jahre lineare Leistungsgarantie

0.55% jährliche Degradation über 25 Jahre

Tiger Pro 72HC

535-555 Watt

MONO-FACIAL MODULE

P-Type

Positive power tolerance of 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems



MBB HC Technology

Key Features



Multi Busbar Technology

Better light trapping and current collection to improve module power output and reliability.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Longer Life-time Power Yield

0.55% annual power degradation and 25 year linear power warranty.



LINEAR PERFORMANCE WARRANTY


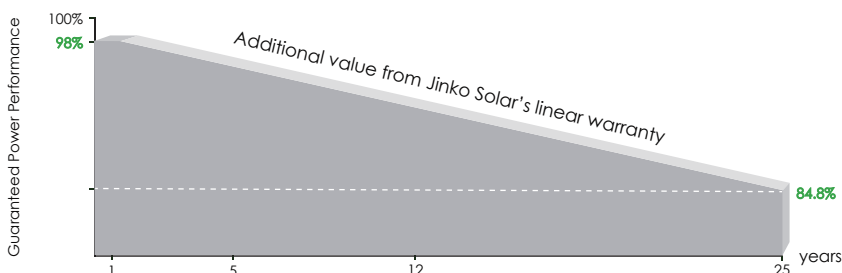


12 Year Product Warranty

25 Year Linear Power Warranty

0.55% Annual Degradation Over 25 years

Engineering Drawings

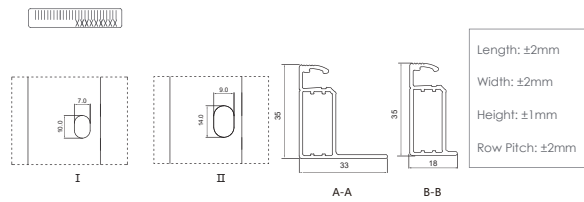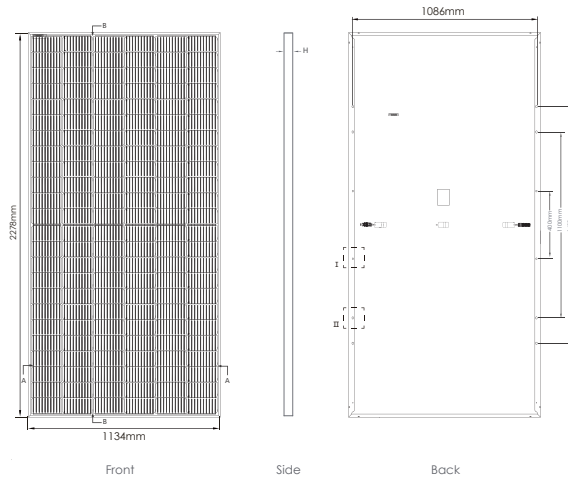


Packaging Configuration

(Two pallets = One stack)

31 pcs/pallets, 62 pcs/stack, 620 pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

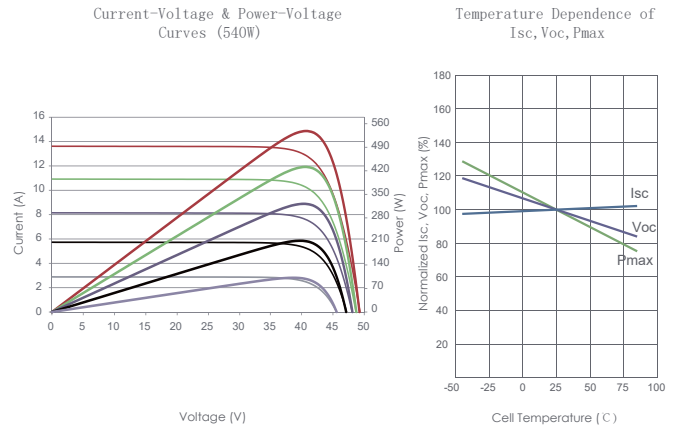

Mechanical Characteristics

Cell Type	P type Mono-crystalline
No. of cells	144 (6×24)
Dimensions	2278×1134×35mm (89.69×44.65×1.38 inch)
Weight	28 kg (61.73 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length

SPECIFICATIONS

Module Type	MM535-72HLD-MB		MM540-72HLD-MB		MM545-72HLD-MB		MM550-72HLD-MB		MM555-72HLD-MB	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	535Wp	398Wp	540Wp	402Wp	545Wp	405Wp	550Wp	409Wp	555Wp	413Wp
Maximum Power Voltage (Vmp)	40.63V	37.91V	40.70V	38.08V	40.80V	38.25V	40.90V	38.42V	40.99V	38.59V
Maximum Power Current (Imp)	13.17A	10.50A	13.27A	10.55A	13.36A	10.60A	13.45A	10.65A	13.54A	10.70A
Open-circuit Voltage (Voc)	49.34V	46.57V	49.42V	46.65V	49.52V	46.74V	49.62V	46.84V	49.72V	46.93V
Short-circuit Current (Isc)	13.79A	11.14A	13.85A	11.19A	13.94A	11.26A	14.03A	11.33A	14.12A	11.40A
Module Efficiency STC (%)	20.71%		20.90%		21.10%		21.29%		21.48%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000/1500VDC (IEC)									
Maximum series fuse rating	25A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.35%/°C									
Temperature coefficients of Voc	-0.28%/°C									
Temperature coefficients of Isc	0.048%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

*STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s